

# FPM-7151W

## 15.6" WXGA Industrial Monitor with PCAP Touch Control, Direct VGA, and DVI Ports



### Features

- 15.6" WXGA TFT LED LCD with true-flat touchscreen
- 16:9 widescreen aspect ratio, increases viewing area by 40%
- Supports 10-point multi-touch control via USB interface in Windows 7/8 OS
- Slim design enables easy installation
- Supports various mount options: panel, wall, desktop, and VESA arm
- Touchscreen with reliable glass surface and PCAP touch control
- Robust system with SECC chassis and IP66-rated magnesium alloy front panel
- OSD control buttons on rear panel
- Lockable I/O connectors

### Introduction

The FPM-7151W is an industrial-grade, widescreen monitor with sleek, simple lines and a true-flat touchscreen. Equipped with PCAP 10-point multi-touch control and an IP66-rated front bezel, FPM-7151W is designed for intuitive operation in harsh industrial environments. Moreover, FPM-7151W supports a range of mount options to ensure easy, single-person installation.

### Specifications

#### General

- **OSD Controls** OSD control buttons on rear panel
- **Certification** BSMI, CCC, CE, FCC Class A, UL
- **Dimensions (W x H x D)** 419.7 x 269 x 47.7 mm (16.52 x 10.59 x 1.88 in)
- **Enclosure** Front panel: Die cast magnesium alloy  
Rear cover: SECC
- **Mount Options** Panel, wall, desktop, VESA (MIS,100,C)
- **Power Input** Phoenix Jack: 24 V<sub>DC</sub> input
- **Power Consumption** 20 W + 20%
- **Video Port** VGA & DVI-D or VGA & HDMI
- **Weight (Net)** 5 kg (11 lb)

#### LCD Display

- **Display Type** WXGA TFT LED LCD
- **Display Size** 15.6"
- **Max. Resolution** 1366 x 768
- **Max. Color** 16.7M
- **Viewing Angle (H/V °)** 170/160
- **Luminance (cd/m<sup>2</sup>)** 300
- **Backlight Life** 50,000 hr
- **Contrast Ratio** 500:1

#### Touchscreen

- **Type** Projected capacitive touch
- **Interface** RS-232 and USB
- **Light Transmission** Above 75%
- **OS Support** Windows XP, Vista, 7, 8, 10, 11, XPe and Linux
- **Multi Touch** 10 points, USB interface in Win 7/8.
- **Hardness** 7H

#### Environment

- **Operating Temperature** 0 ~ 55 °C (32 ~ 131 °F)
- **Storage Temperature** -20 ~ 60 °C (-4 ~ 140 °F)
- **Humidity (Storage)** 10 ~ 90% non-condensing
- **IP Rating** Front panel is IP66 compliant
- **Vibration** 5 ~ 500 Hz, 1 Grms (Operating, Random)

### Ordering Information

- **FPM-7151W-P3AE** 15.6" WXGA Ind Monitor w/PCT TS (VGA/DVI)

### Optional Accessories


- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801-11** Power Cable UK Plug 1.8 M
- **1700000596-11** Power Cable China/Australia Plug 1.8 M
- **PWR-247-DE** Adapter 100-240V 60W 24V 2.5A

#### Mounting kit

- **FPM-1000T-SMKE** Desktop Mounting kit for FPM series
- **PPC-174T-WL-MTE** Wall mount kit A800B
- **PPC-ARM-A03** ARM VESA Standard (A-CLEVER)
- **PPC-STAND-A1E** Stand mounting kit

## Dimensions


Unit: mm

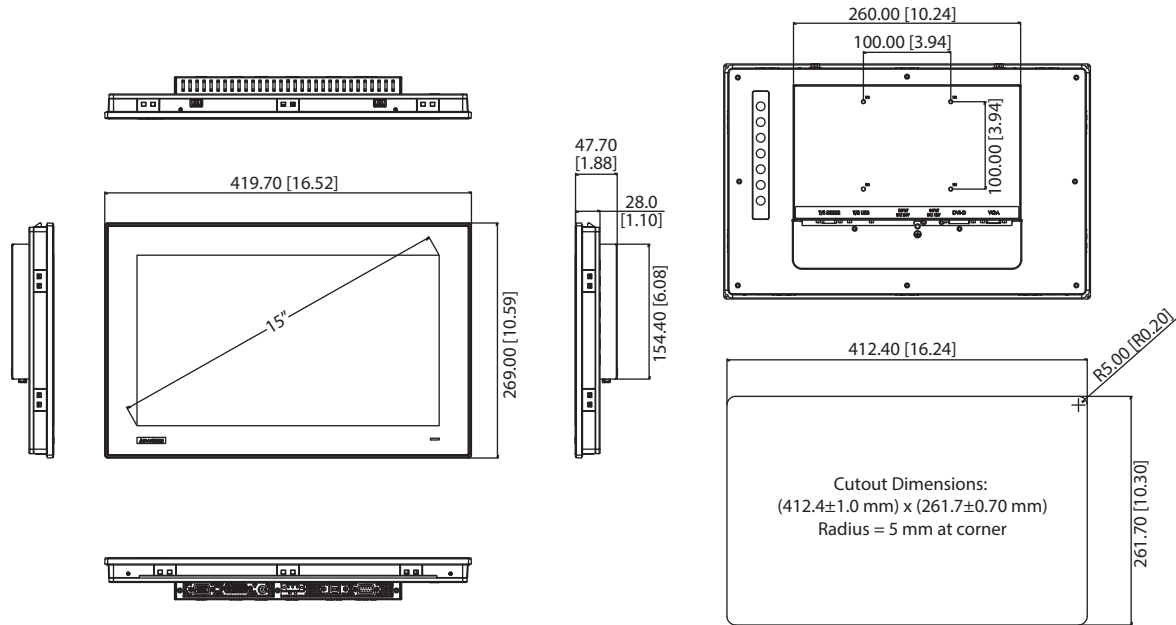

**Panel Cutout Dimensions: 412.40 x 261.70 mm (16.24 x 10.30 in)**

## Easy Installation


**Snap hook in rear cover**



**Stopper screw in rear cover**



## Rear View

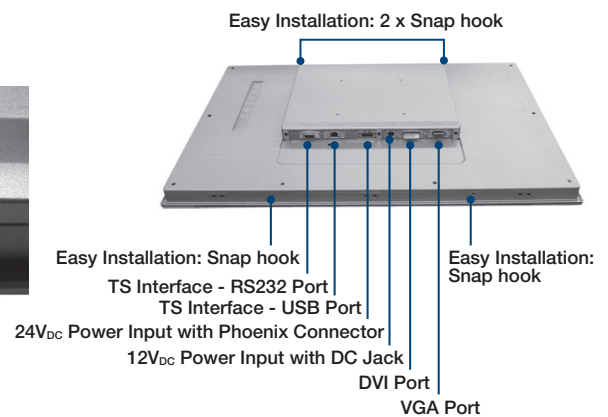

## Packing list

| Item            | Part No.      | Description                                                              | Qty |
|-----------------|---------------|--------------------------------------------------------------------------|-----|
| Clamper         | 1962055040    | CLAMPER PPC-55 M1632611 A2                                               | 10  |
| Clamper screw   | 1935042520    | Screw M4*25L R/S D=8.3 H=2.5 + ST BZn                                    | 10  |
| USB touch Cable | 1700017851-01 | M Cable USB-A(M)/USB-B(M) 180CM black color                              | 1   |
| RS232 cable     | 1700091800    | M Cable D-SUB 9P(M)/D-SUB 9P(F) 183CM                                    | 1   |
| VGA cable       | 1700021332-11 | M CABLE D-SUB 15P(M)/D-SUB 15P(M) 180CM VESA B1                          | 1   |
| GND cable       | 1703011001-11 | A Cable G-TEM. 100CM C=GR/Y PPC-55                                       | 1   |
| Terminal Block  | 1652007930-01 | Plug-In Block 1x3P/5.08mm/PA66/F/VA/Sn/GR/H15.0 (24V <sub>DC</sub> only) | 1   |