

# FPM-817S

**17" SXGA Industrial Monitor with Resistive Touch Control, Direct VGA, DP Ports, and 304 Stainless Steel Front Bezel**



## Introduction

The FPM-800S series are rugged industrial monitors that support a wide operating temperature range (-20 ~ 60 °C/-4 ~ 140 °F), making them suitable for diverse applications. The true-flat front panel is IP66 rated for protection from water and dust to ensure easy cleaning. With the provision of a 304 stainless steel front bezel, FPM-800S is especially suitable for operation in hazardous and strict hygiene environments.

## Specifications

### General

▪ <b>OSD Controls</b>	OSD control pad on rear panel with lockable function, 2 x user-defined contrast/brightness settings
▪ <b>Certification</b>	CE, FCC Class A, BSMI, CCC, UL
▪ <b>Dimensions (W x H x D)</b>	432.5 x 365.5 x 59.3 (17.03 x 14.39 x 2.33 in)
▪ <b>Enclosure</b>	Front panel: 304 stainless steel bezel Rear cover: SPCC with anti-rust coating
▪ <b>Mount Options</b>	Panel, wall, desktop, VESA arm
▪ <b>Power Input</b>	Phoenix jack: 24 V <sub>DC</sub> input
▪ <b>Power Consumption</b>	12W +20%
▪ <b>Video Port</b>	VGA+DP
▪ <b>Weight (Net)</b>	6.2kg (13.67 lb)

### LCD Display

▪ <b>Display Type</b>	SXGA TFT LCD
▪ <b>Backlight Type</b>	LED
▪ <b>Display Size</b>	17"
▪ <b>Max. Resolution</b>	1280 x 1024
▪ <b>Max. Color</b>	16.7M
▪ <b>Viewing Angle (H/V)</b>	160°/140°
▪ <b>Luminance</b>	350 cd/m <sup>2</sup>
▪ <b>Backlight Life</b>	50,000 hr
▪ <b>Contrast Ratio</b>	800:1

## Features

- 17" SXGA TFT LED LCD with 50K backlight lifetime
- Robust design with 304 stainless steel front bezel and anti-rust coated SPCC rear cover
- Wide operating temperature range (-20 ~ 60 °C/-4 ~ 140 °F)
- Increased reliability with enhanced 5-wire resistive touch sensor
- Anti-glare screen with tempered glass and IP66-certified front panel
- Direct VGA+DP video input interface
- OSD control pad with lockable function on rear panel
- Supports panel, VESA, wall, desktop, and stand mounting

### Touchscreen

▪ <b>Driver</b>	Penmount 6000
▪ <b>Type</b>	5-wire resistive with enhanced ITO film
▪ <b>Interface</b>	USB
▪ <b>Lifespan</b>	36 million with a silicone rubber R8 finger, writing rate is by 250g at 2 times/s
▪ <b>Light Transmission</b>	> 80%
▪ <b>OS Support</b>	Windows XP, 2000, Vista, 7,8,10,11, Embedded, CE, Linux

### Environment


▪ <b>Operating Temperature</b>	-20 ~ 60 °C (-4 ~ 140 °F)
▪ <b>Storage Temperature</b>	-30 ~ 70 °C (-22 ~ 158 °F)
▪ <b>Humidity (Storage)</b>	10 ~ 90% non-condensing
▪ <b>IP Rating</b>	IP66-rated front panel
▪ <b>Shock</b>	11 ms, 10G (non-operating, half-sine wave)
▪ <b>Vibration</b>	5 ~ 500 Hz, 1 Grms (operating, random)

## Ordering Information

▪ <b>FPM-817S-R6AE</b>	17" SXGA industrial monitor with stainless steel front bezel, wide operating temperature, and resistive touchscreen
------------------------	---

## Dimensions

Unit: mm

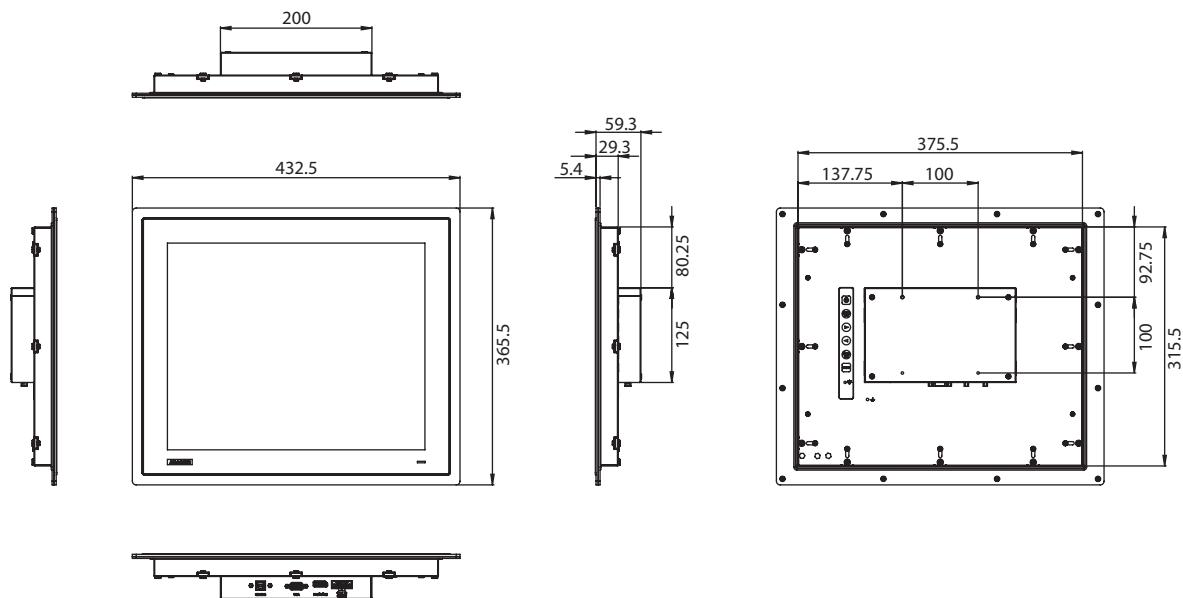

Panel Cutout Dimensions: 382 x 320 mm (15.04 x 10.91 in)


## Optional Accessories

- **1702002600** Power cable US plug 1.8 M
- **1702002605** Power cable EU plug 1.8 M
- **1702031801-11** Power cable UK plug 1.8 M
- **1700000596-11** Power cable China/Australia plug 1.8 M
- **PWE-247-DE** Adapter 100 ~ 240V 60W 24V 2.5A

## Mounting kit

- **FPM-1000T-SMKE** Desktop Mounting kit for FPM series
- **PPC-174T-WL-MTE** Wall mount kit A800B
- **PPC-ARM-A03** ARM VESA Standard (A-CLEVER)
- **PPC-STAND-A1E** Stand mounting kit

## Front View

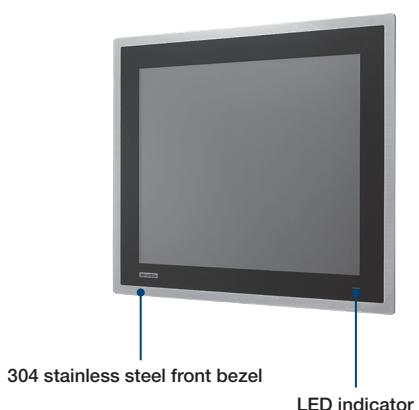

## Rear View

